


HOW TO INSTRUCTIONS



Finished ceiling edge

Brackets and Screws
"ONLY PARTS NEEDED"

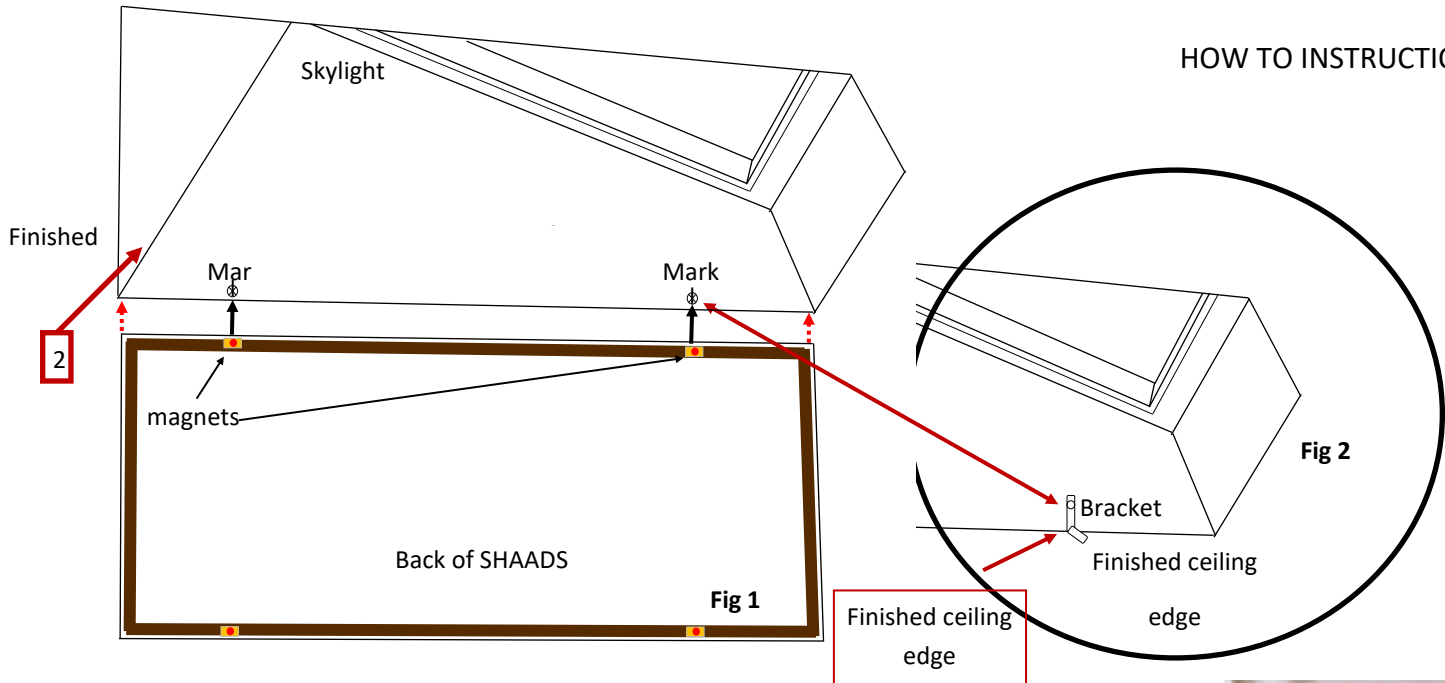

SKYLIGHT COVER INSTALLATION:

When unwrapping, use caution not to damage or pierce the fabric. If damaged during shipping, please notify us immediately, within 2 days of delivery.

1. Turn your SHAADS cover over to the back.
2. Center your SHAADS to the skylight cavity, mark center of the magnet on the inside the cavity at the edge of the ceiling, "see fig 1". Do the same on the other side of the skylight cavity.
3. Where you made these marks now place a bracket at the edge of the ceiling and screw it into the inside walls of cavity skylight. Shown above

"see fig 2". Now place the cover, with the magnet side up, onto the brackets and adjust. **YOU ARE DONE !!!**

REMOVAL: When removing for cleaning of the cover. Carefully place your hands at the two top corners or at the two bottom corners of the SHAADS, pull away slowly from the brackets until all magnets release.

RE-INSTALL: the same way. Place magnets onto the bottom 2 brackets first then lift cover up to the 2 top "L" brackets.

NOTE: The SHAADS Cover can be cut smaller to fit slightly inside the skylight cavity should you choose this look? "You must let us know before placing your order." With this request remember to adjust all brackets higher equally inside the cavity. When you received your new cover test your cover inside the cavity first to see how it fits. Skylight will vary in measurements be sure to measure each SKYLIGHT separately.